


ELECTRONIC THEATRE CONTROLS

Source Four™ PAR MCM

PAR-MCM Series

TYPE-SAA FIXTURE # 1

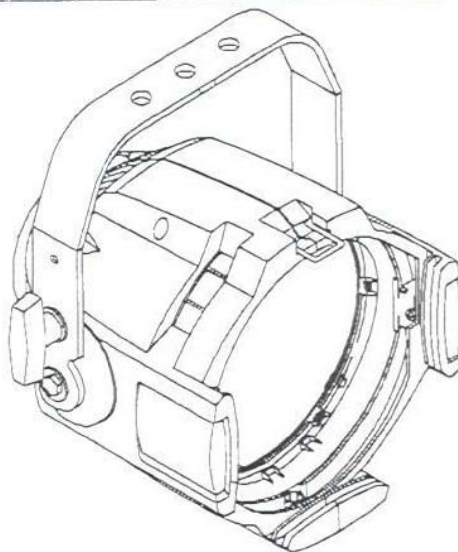

SPECIFICATIONS

Open reflector lighting fixture

PHYSICAL	Die-cast aluminum
	Tool free cleaning of the reflector or lens
	High-impact, thermally insulated knobs
	Sealed reflector housing
	Reflector temperature control through integral heat sink fins
	Gel frame holders with two accessory slots
	Top-mounted, gel-frame retainer
	Steel yoke with two mounting positions
	Positive locking yoke clutch
	UL and cUL listed
ELECTRICAL	115-240V, 50/60Hz
	High-temperature three-conductor 36" leads in a glass fiber outer sleeve
	Supports ETC Dimmer Doubling™ technology:
LAMP	HPL — compact tungsten filament contained in a krypton/xenon-filled quartz envelope (see table for suitable lamp types)
	575W maximum
	Patented filament geometry makes for extremely efficient light collection and transmission
	Integral die-cast aluminum heat sink lamp base
LENSES	Four heat resistant, molded borosilicate glass lenses supplied with each unit: Very Narrow Spot (VNSP), Narrow Spot (NSP), Medium Flood (MFL) and Wide Flood (WFL).
	Tool free lens changing
	Thermally insulated lens rotation ring outside of the fixture
OPTICAL	Modified parabolic and multifaceted reflector
	Computer designed reflector facets molded directly into heat sink casting, finished with an enhanced aluminum deposition process, and polished for maximum reflectance
	Enhanced Aluminum (EA) also available

ORDERING INFORMATION

Source Four ParMCM

Model #	Description
PAR-MCM	Source Four PAR Metal Cold Mirror (Black)
PAR-MCM-1	Source Four PAR Metal Cold Mirror (White)

ETC Source Four PAR MCM are supplied with 4 lens set: VNSP, NSP, MFL, WFL; color frame and 3' (91.4cm) bare leads

Connector Designation

Use Suffixes below to specify Factory-Fitted Connector type	
Model#	Description
A	Parallel-blade U-ground connector
B	Two-pin and ground, 20 amp connector
C	Grounded, 20 amp, twistlock connector
M	Dimmer Doubling™ connector (NEMA LS15P)

Source Four PAR EA Accessories

Model#	Description
407CF	Color frame (7.5") (Included)
400SC	Safety Cable
400CC	C-Clamp
400-VNSP	Very Narrow Spot lens
400-NSP	Narrow Spot lens
400-MFL	Medium Flood lens
400-WFL	Wide Flood lens
400UV	UV filter—Eliminates UV below 400nm
400-LS4	Set of four Source Four PAR lenses (VNSP, NSP, MFL, WFL)
400PTH3	Top hat, 3"
400PTH6	Top hat, 6"
400PHH	Half hat
400XBTH	Cross baffle top hat
400PGE3	Gel extender, 3"
400PGE6	Gel extender, 6"
400BD	Barn door
400L	Egg crate louver
400WB	Weighted base

Note: For colors other than black or white, please call ETC.

